

” Reflective Graphic Sheet Nikkalite R851200PI”


Solvent inkjet printing media, Flexible enclosed lens retroreflective sheeting.

Physical Characteristics

Color	: White	Surface material	: Acrylic resin
Size	: 1220mm×45.7m (48”×50yd)	Adhesive	: Pressure sensitive (PS)
Thickness	: 140–160µm (without liner)	Minimum Coefficient of retroreflection	: ASTM D4956 Type I
Paper core	: 3 inch (inside diameter)	Accelerated artificial weathering	: Table 1 & Graph 1
Durability	: 7 years (coefficient of retroreflection & color for ASTM D4956 Type I)		

Table 1 Coefficient of retroreflection after accelerated artificial weathering test 【cd·lx⁻¹·m⁻²】

	Observation Angle	0.2°			0.33°			0.5°		2.0°		
	Entrance Angle	5°	30°	40°	5°	30°	40°	5°	30°	5°	30°	40°
R851200WI	Initial	104	70	38	83	63	36	53	50	12	9.4	8.1
	3,000 h	84	66	42	63	58	39	38	45	13	9.9	8.1
ASTM Type I		70	30	-	-	-	-	30	15	-	-	-

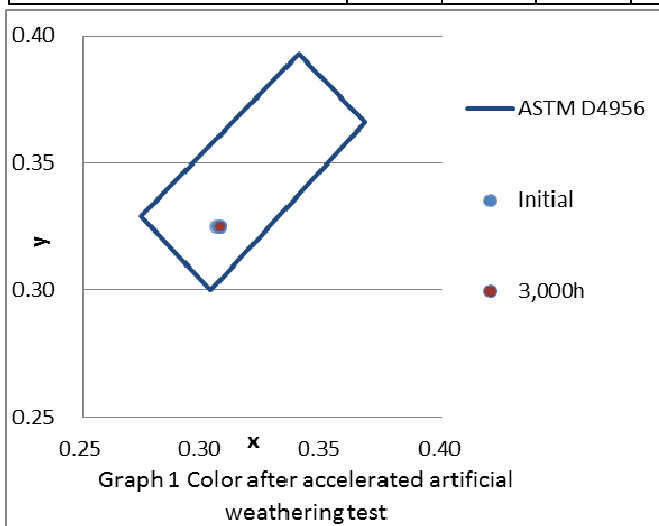

Accelerated artificial weathering test

Xenon Arc Apparatus.

Irradiance set point at 340 nm : 0.35W / (m²nm)

Black panel Temperature set point : 63°C(145 °F)

Water spray cycle : alternating periods of 102 minutes light only 18 minutes light and water spray.

※The above figures are measured values, not guaranteed values.

Caution

- ✓ Confirm actual printing performance before using the appliance, and then use it.
- ✓ The performance of graphic is affective by surface condition, printing machine maintenance.
- ✓ The shelf life of sheeting is 12 months from the delivery date on the original box. Please use within a half year to avoid storage in excessively humid and hot area.



NIPPON CARBIDE INDUSTRIES CO., LTD.

Retroreflective Materials Division

16-2, 2-Chome Konan, Minato-ku, Tokyo, JAPAN

Post cord: 108-8466

Phone: + 81-(0)3-5462-8206 Fax: + 81-(0)3-5462-8271